

# Diamond Standart



## RECOMMENDED USAGE

Education  
Healthcare  
Retail  
Hospitality  
Offices

## Performance, Features & Benefits

2/4 meter widths, cost effective, Broad color range, Great patterns, High residual indentation, Dimensionally stable, Anti-bacterial, Antistatic, 10 year warranty

### Technical parameters

### Standards

#### DESCRIPTION

Construction		compact heterogeneous
Total thickness	EN 428	2,0 mm
Wear layer thickness	EN 429	0,7 mm
Width of roll	EN 426	2/4 m
Length of roll	EN 426	20 lm
Total weight	EN 430	2,2 kg/m <sup>2</sup>

#### CLASSIFICATION


European classification	EN 685	class: 34/43
-------------------------	--------	--------------

#### PERFORMANCE

Abrasion group	EN 660-1	T
Residual indentation	EN 433	max. 0,1 mm
Dimensional stability	EN 434	max. 0,2 %
Fire resistance	EN 13501-1	class: Bfl-s1
	DIN 4102/ÖNORM	class: B1
	Gost 30402-94	class: G1
Slip resistance	DIN 51130	R9
	EN 13893	DS
Electrical resistance	EN 1815	< 2 kV
	EN 1081	≤ 10 <sup>9</sup> Ω
Chemical resistance	EN 423	✓
Bacterial resistance	EN ISO846:1999	✓
Light fastness	EN 20105 B02	6
Castor chair resistance	EN 425	✓
Anti-bacterial and fungicid treatment		graboSAN
Seaming method		hot or cold welding
Warranty		10 year



- 1 Wear layer
- 2 Design
- 3 Compact layer
- 4 Glass fibre reinforcement
- 5 Back layer

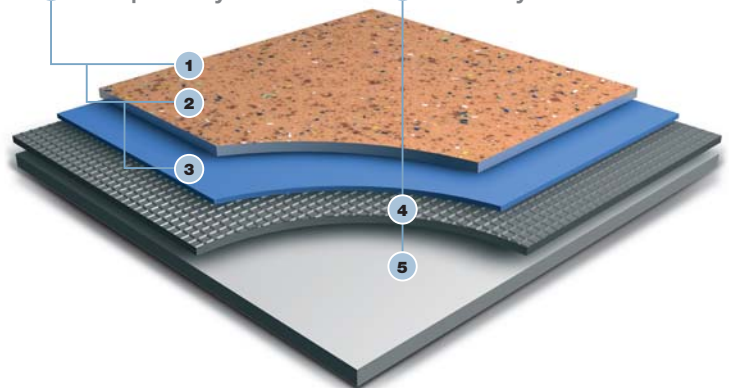

# Diamond Standart Metal


grabo  
SAN  
minimize  
the growth of  
microorganisms

SOLVENT  
FREE


NOI  
WAX




4564-469




4564-470




4564-479



4564-481



4564-476



4564-473




4564-494




4564-495




4564-493




4564-460




4564-475




4564-496



4564-477



4564-471



4564-472



4564-474