


CLASSIC IMPERIAL gerflor.com



Gerflor[®]
theflooringgroup

CLASSIC IMPERIAL

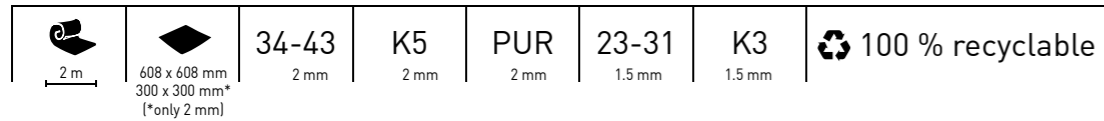

① PUR surface treatment
② Compacted, calendered floorcovering

- ▶ High performing homogeneous multipurpose flooring suitable for heavy traffic areas.
- ▶ Flexible homogeneous calendered compacted floorcovering available in tiles or sheets.
- ▶ PUR surface treatment: good foundation for routine maintenance and avoids the immediate use of an acrylic emulsion after installation.
- ▶ Directional design.
- ▶ Densely compacted surface for improved wear and ease of maintenance.
- ▶ Incorporates a fungistatic and bacteriostatic treatment.

- ▶ Compact sheet without foam backing
- ▶ Compact tile without foam backing
- ▶ 1.5 mm - 2 m x 20 lm
- WR: welding rod



0004 Clay
WR: 0585 0679
NCS: 3020-Y50R



0103 White
WR: 0585 0807
NCS: 1000




0002 Platinum
WR: 0585 0304
NCS: 2502-B



0005 Steel
WR: 0585 0514
NCS: 3502-B



0013 Pewter
WR: 0585 0413
NCS: 6005-R80B

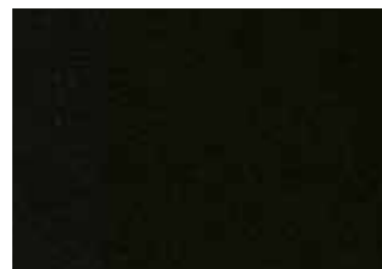

0102 Black
WR: 0585 0675
NCS: 9000

CLASSIC IMPERIAL



0016 Sand
WR: 0585 0501
NCS: 1005-Y40R



0007 Crocus
WR: 0585 0702
NCS: 3020-R70B



0112 Storm
WR: 0585 0680
NCS: 3020-B



0010 Azure
WR: 0585 0805
NCS: 3030-B



0019 Blue
WR: 0585 0562
NCS: 4040-R90B



0003 Ivory
WR: 0585 0818
NCS: 2010-Y30R



0014 Brown
WR: 0585 0139
NCS: 4010-Y50R



0015 Leaves
WR: 0585 0054
NCS: 4010-B70G



0012 Mint
WR: 0585 0524
NCS: 3020-B90G



0020 Forest
WR: 0585 0575
NCS: 4040-B70G



0109 Sun
WR: 0585 0521
NCS: 2040-Y20R



0006 Honey
WR: 0585 0318
NCS: 2010-Y40R



0004 Clay
WR: 0585 0679
NCS: 3020-Y50R



0018 Terra
WR: 0585 0574
NCS: 3050-Y60R



0017 Red
WR: 0585 0345
NCS: 3050-Y90R

DESCRIPTION / <i>BESCHREIBUNG</i> / DESCRIPTION / <i>BESCHRIJVING</i> / DESCRIPCIÓN / <i>DESCRIÇÃO</i> / DESCRIZIONE			Classic Imperial 1.5 mm	Classic Imperial 2 mm
Total thickness / <i>Gesamtdicke</i> / Epaisseur totale / <i>Totale dikte</i> / Espesor total / <i>Essatura total</i> / Spessore totale	EN 428	mm	1.5	2.00
	ASTM F386-02	inch	0.06	0.08
Weight / <i>Flächengewicht</i> / Poids / <i>Gewicht</i> / Peso / <i>Peso</i> / Peso	EN 430	g/sq.m	2520	3400
Width/length of sheet / <i>Bahnenbreite/-länge</i> / Largeur/longueur des lés / <i>Rolbreedte/Rollenlge</i> / Ancho/largo de rollos / <i>Largura/comprimento dos rolos</i> / Larghezza/lunghezza dei teli	EN 426	cm/lm	200 / 20	200 / 20
	-	feet - inch	6'6" / 66"	6'6" / 66"
Coverage / roll	-	sq.ft	430.56	430.56
	-	sq.m	40	40
Tile size / <i>Format Fliesen</i> / Format dalles / <i>Formaat der tegels</i> / Dimensiones de las losetas / <i>Dimensões dos mosaicos</i> / Dimensione delle piastre	EN 427	mm	-	300 x 300 608 x 608
Number of tiles per package / Nombre de dalles par boîte / Aantal tegels per doos / Cantidad de losetas/caja / Quantidade dos mosaicos/caixa / N° piastre per confezione	-	-	-	50 20
CLASSIFICATION / <i>KLASSIFIZIERUNG</i> / CLASSIFICATION / <i>CLASSIFICATIE</i> / CLASIFICACIONES / <i>CLASSIFICAÇÕES</i> / CLASSIFICAZIONI				
Norm/product specification / <i>Produkt Norm</i> / Norme produit / <i>Technische eigenschappen</i> / Normas / <i>Normas</i> / Norma prodotto	-	-	EN 649	EN 649
	ASTM F 1913-04	-	compliant	compliant
European classification / <i>Europäische Klassifizierung</i> / Classement européen / <i>Europese classificatie</i> / Europea / <i>Europeia</i> / Europea	EN 685	class	23-31	34-43
K rating / <i>Beanspruchungsklasse</i> / Classement K / <i>K classificatie</i> / Clasificación K / <i>Classificação K</i> / Classificazione K	-	class	K3	K5
Fire rating / <i>Brandverhalten</i> / Classement feu / <i>Brand classificatie</i> / Fuego / <i>Fogo</i> / Reazione al fuoco	EN 13501-1	class	Bfl - s1	Bfl - s1
	ASTM E648-08	class	-	class I
	CAN/ULC S102.2	-	-	-
Static electrical propensity / <i>Begehaufldung</i> / Potentiel de charge / <i>Elektrische eigenschappen</i> / Comportamiento electrostático / <i>Comportamento electrostático</i> / Resistenza elettrica	EN 1815	kV	< 2	< 2
PERFORMANCE / <i>TECHNISCHE EIGENSCHAFTEN</i> / PERFORMANCES / <i>TESTRESULTAAT</i> / CUALIDADES TÉCNICAS / <i>PERFORMANCES</i> / CARATTERISTICHE TECNICHE				
Wear resistance / <i>Verschleißverhalten</i> / Résistance à l'usure / <i>Slijtvastheid</i> / Abrasión / <i>Abrasão</i> / Resistenza all'abrasione	EN 660.2	mm ³	≤ 15.0	≤ 7.5
Wear group / <i>Verschleißgruppe</i> / Groupe d'abrasion / <i>Groep slijtvasheid</i> / Grupo de abrasión / <i>Grupo de abrasão</i> / Gruppo di abrasione	EN 649	group	F	M
Dimensional stability / <i>Maßstabilität</i> / Stabilité dimensionnelle / <i>Maatvastheid</i> / Estabilidad dimensional / <i>Estabilidade dimensional</i> / Stabilità dimensionale	EN 434	%	Sheet ≤ 0.40	Sheet ≤ 0.40 Tile ≤ 0.25
Residual indentation / <i>Resteindruck</i> / Poinçonnement statique rémanent / <i>Indrukbelasting</i> / Punzonamiento / <i>Punçoamento</i> / Impronta	EN 433	mm	≈ 0.03	≈ 0.03
Thermal conductivity / <i>Wärmeleitfähigkeit</i> / Conductivité thermique / <i>Thermische weerstand</i> / Resistencia térmica / <i>Resistência térmica</i> / Resistenza termica	EN 12 524	W/(m.K)	0.25	0.25
Colour fastness / <i>Lichtechtheit</i> / Solidité lumière / <i>Lichtechtheid</i> / Resistencia a la luz / <i>Estabilidade das cores</i> / Solidità alla luce	EN 20 105 B02	degree	≥ 6	≥ 6
Chemical resistance / <i>Verhalten gegenüber Chemikalien</i> / Résistance aux produits chimiques / <i>Chemische bestendigheid</i> / Resistencia a los productos químicos / <i>Resistência aos produtos químicos</i> / Resistenza ai prodotti chimici	EN 423	class	OK	OK <i>ständig gegenüber Haushaltschemikalien und nicht färbenden, verdünnten Säuren und Laugen bei kurzzeitiger Einwirkung</i>
Fungistatic and bacteriostatic treatment / <i>Fungistatisch und bakteriostatisch</i> / Fongistatique et bactériostatique / <i>Bacteriologisch en schimmelwerend</i> / Bacteriostático y fungistático / <i>Bacteriostático e fungistático</i> / Batteriostatico e micostatico	-	-	OK	OK
Surface treatment / <i>Oberflächenvergütung</i> / Traitement de surface / <i>Oppervlaktebehandling</i> / Tratamiento de superficie / <i>Tratamento de superficie</i> / Trattamento di superficie	-	-	PUR	PUR
TVOC after 28 days / <i>TVOC (28 Tage)</i> / TVOC (28 jours) / <i>TVOC (28 dagen)</i> / TVOC (28 dias) / <i>TVOC (28 dias)</i> / TVOC (28 giorni)	ISO 16000-6	µg/m ³	< 10	< 10
CE marking / <i>CE Kennzeichnung</i> / Marquage CE / <i>EG-conformiteitsmerk</i> / Marca de conformidad CE / <i>Marca de conformidade CE</i> / Marcatura CE di conformità				
CE	EN 14041	-		

INSTALLATION

Laying is the responsibility of the installer. Installation should be made in accordance with installation guidelines supplied and regularly updated by Gerflor's Technical Department. Installation should be carried out in accordance with local standards. Subfloor to be smooth, hard, clean and dry prior to laying. Where applicable the subfloor must incorporate an effective Damp Proof Membrane. The material must be allowed to acclimatise 24 hours prior to installation in a room temperature of between 18-24°C. All seams must be heat welded using Gerflor matching weld rod.

MAINTENANCE

Maintenance should be carried out regularly to retain the appearance and durability of the floor. The floorcovering should be maintained with regular sweeping and damp mopping using a neutral cleanser, or machine scrubbing with an appropriate pad. Further maintenance instructions are available upon request.

Rubber leaves indelible stains on vinyl floorings: do not use mats with rubber backing and replace tubular furniture feet with those made of PVC or polyamide.

Further installation and maintenance instructions are available from Gerflor.



Health & Safety



ISO 14001



Recycling



LCA
Life Cycle Analysis



FIND GERFLOR ON YOUR SMART PHONE

<http://m.gerflor.com>



Gerflor
theflooringgroup